


PLAN VIEW

NOTES TO CONTRACTOR:

- RESIDENTIAL DRIVEWAYS TO BE 12 FEET TO 18 FEET IN WIDTH.
- COMMERCIAL AND INDUSTRIAL DRIVEWAYS TO BE A MINIMUM OF 20 FEET FOR 2-WAY, 16 FEET FOR 1-WAY, AND A MAXIMUM OF 36 FEET WIDE.
- ALL CONCRETE SHALL BE 3000 P.S.I.
- \* ELEVATION "B" MINUS ELEVATION "A" EQUALS 1 INCH.

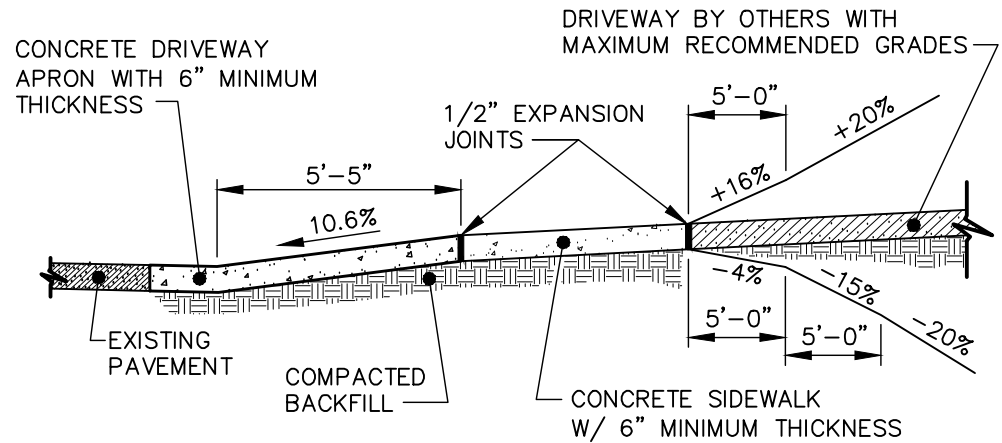

TYPICAL SECTION

NOTES:

1. CURB SHALL BE TAPERED TO FINISH FLUSH WITH SIDEWALK.
2. BEGINNING RADIUS SHALL NOT ENCR OACH ON ADJACENT PROPERTIES BASED ON A PROJECTION OF THE PROPERTY LINE FROM THE RIGHT OF WAY TO THE CURB LINE.
3. SIDEWALK SECTION SHALL BE REQUIRED ALONG ALL STREETS.
4. THE TOWN IS NOT RESPONSIBLE FOR VEHICLES THAT DRAG DUE TO GRADE OF DRIVEWAY. THE DRIVEWAY IS PRIVATELY MAINTAINED.

**STANDARD DRIVEWAY APRON**



EFFECTIVE: 12/10/09

DETAIL No.

03000.13

SHEET 1 OF 1