

FRONT VIEW

LITHONIA WALL-PAK TWP150F W/ TWPWG WIRE GUARD, OR APPROVED EQUAL

JOINTS TO BE SEALED WITH MASTIC THEN GROUTED WITH NON-SHRINK PORTLAND CEMENT GROUT

HEADWALLS W/ WINGWALLS REQUIRED ON BOTH ENDS


LIGHT

SEALING OF FIXTURES TO BE DESIGNED IN ACCORDANCE W/ IES STANDARDS

CONDUIT

PRECAST CONCRETE BOX CULVERT CONFORMING TO ASTM C 789M OR ASTM C 850M

0.5% MIN. SLOPE

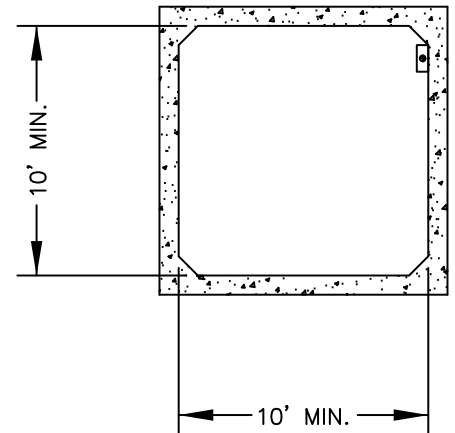

NOTE: APPROPRIATE SIGNAGE MAY BE REQUIRED AT ENTRANCE TO INDICATE NARROWING TRAIL WIDTH AND LIMITED VERTICAL CLEARANCE.



EFFECTIVE: 07/01/04

PRECAST CONCRETE PEDESTRIAN/BICYCLE UNDERPASS

DETAIL No.

03000.17

SHEET 1 OF 1