


PLAN VIEW

USE SOLID BRICK/BLOCK & MORTAR

PIPE DIAMETER	MINIMUM WALL THICKNESS
8" - 12"	4"
16" OR GREATER	8"

*LOCATED IN FIRST MANHOLE FROM TIE-IN. SOLID WALL MUST BE BUILT BEFORE LAYING NEXT RUN OF PIPE.

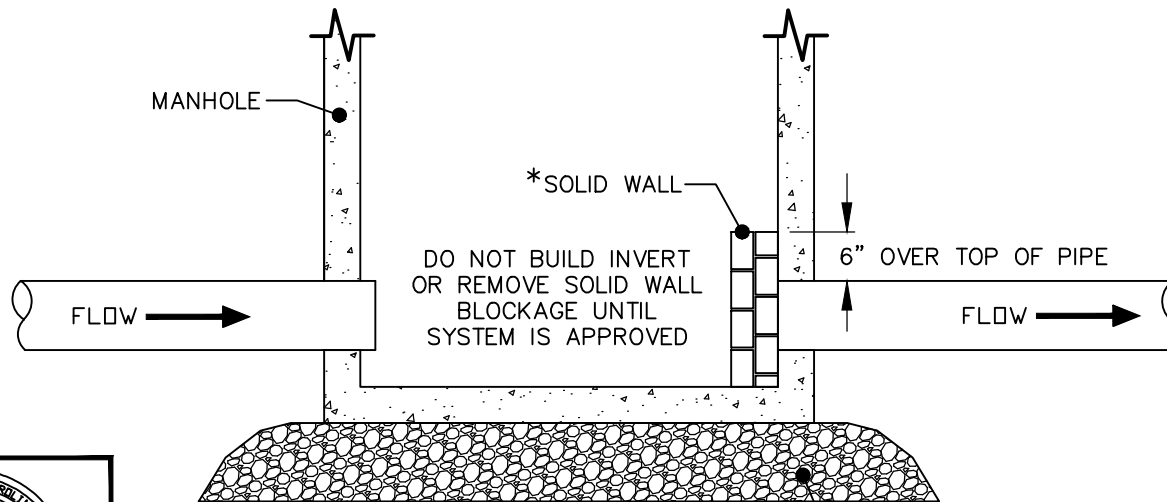

SECTION VIEW

SANITARY SEWER PROTECTION DURING CONSTRUCTION



EFFECTIVE: 01/05/17

DETAIL No.

07000.16

SHEET 1 OF 1