


CONCRETE SLAB


STANDARD MANHOLE RING AND COVER (PER DETAIL 07000.03) MAY BE CAST IN SLAB OR SECURED TO TOP OVER STEPS

NOTES:

1. EITHER SOLID BRICK, SOLID BLOCK, OR PRECAST CONCRETE MAY BE USED.
2. STANDARD STEPS REQUIRED, 16 INCHES ON CENTER, WHERE DEPTH EXCEEDS 3 FEET.
3. USE MINIMUM 3,000 P.S.I. CONCRETE MIX.
4. INSIDE DIMENSION FOR 24 INCH PIPE AND GREATER USE PIPE DIAMETER PLUS 12 INCHES.
5. WHERE DEPTH EXCEEDS 3 FEET, MANHOLE RING AND COVER TO BE LOCATED OVER STEPS.
6. LETTERING FOR MANHOLE COVER PER DETAIL 07000.03.

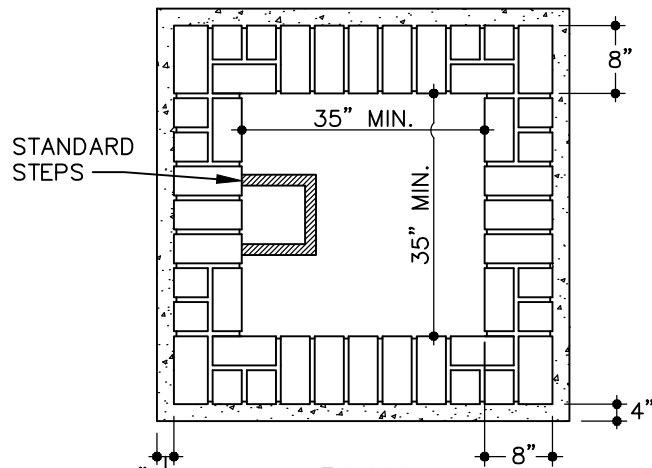

PLAN

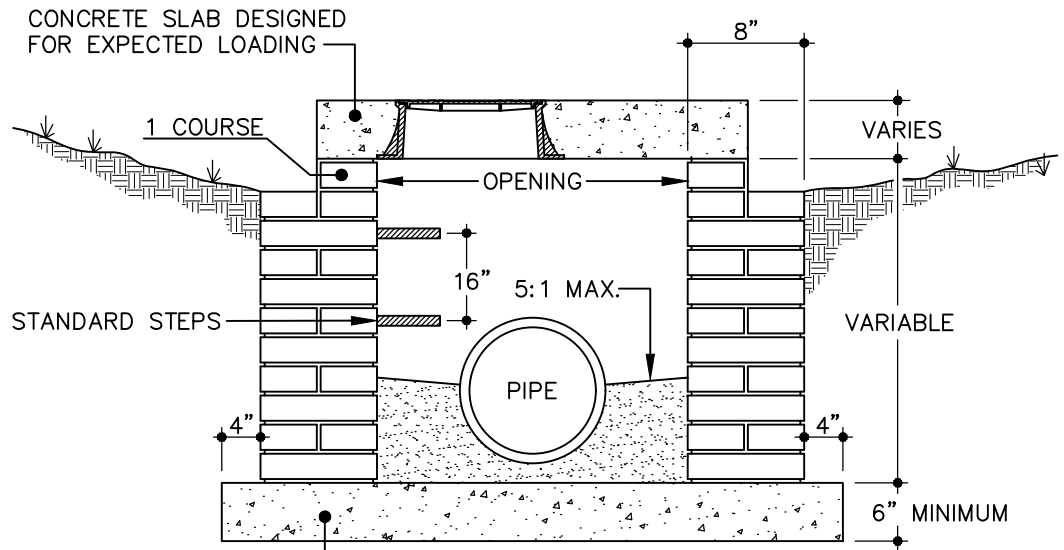

SECTION



EFFECTIVE: 01/05/17

STANDARD YARD INLET WITH CONCRETE SLAB

DETAIL No.

08000.01

SHEET 1 OF 1