

**POST MOUNTING  
DETAIL**

BOLT (TYPICAL). SEE POST MOUNTING DETAIL (THIS SHEET).

SIGN: MUTCD W7-5.  
0.125 MINIMUM GAUGE ALUMINUM,  
GRADE 6061 OR BETTER.

USE FLAT POUND-IN POST CAP. PAINT TO MATCH POST.

2'-0" MIN.  
5'-0" MAX.


1'-6"

FROM FINISHED GRADE OF TRAIL  
4'-0" MINIMUM  
5'-0" MAXIMUM

SEE NOTE 4

2 3/8" OUTER DIAMETER STEEL POST,  
PAINT COLOR C-1: PMS 2955  
(PUGET SOUND BLUE, SATIN FINISH)

SLOPE TO DRAIN  
AWAY FROM POST

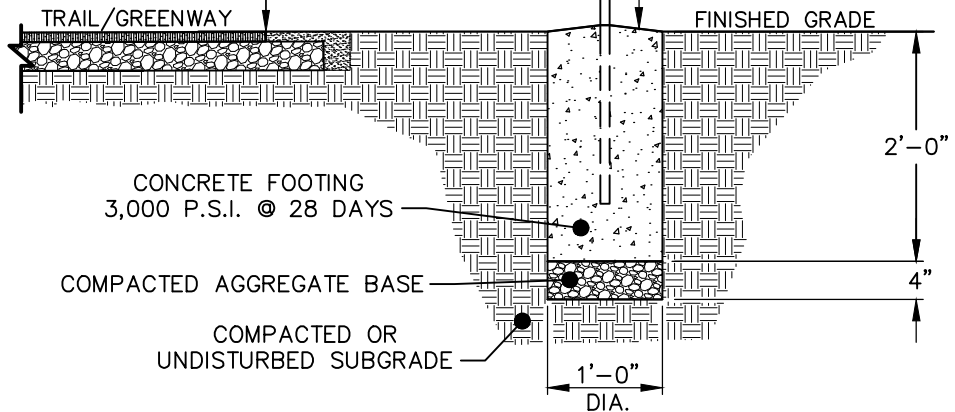

**FRONT VIEW**

**NOTE:**

1. COLOR CODE REFERENCES THE PANTONE MATCHING SYSTEM.
2. ALL VISIBLE WELDS TO BE CONTINUOUS AND GROUND TO PROVIDE A SMOOTH SURFACE.
3. SIGN SHALL MEET CURRENT **MUTCD** REQUIREMENTS FOR COLOR AND REFLECTION.
4. IF **MUTCD** W1-5 SIGN FACE IS TO BE MOUNTED ON SAME POLE, STEEP SLOPE SIGN FACE SHALL BE MOUNTED PER HEIGHT SPECIFICATIONS AT RIGHT, AND CURVES AHEAD SIGN SHALL BE MOUNTED DIRECTLY BELOW.



EFFECTIVE: 01/05/17

**STANDARD PUBLIC TRAIL SIGN: STEEP SLOPE**

DETAIL No.

09000.35

SHEET 1 OF 1