



SIGN: MUTCD R1-1.  
 0.125 MINIMUM GAUGE ALUMINUM SIGN, GRADE 6061  
 OR BETTER. ALL REFLECTIVE LETTERING SHALL BE  
 '3M HIGH INTENSITY GRADE PRISMATIC REFLECTIVE  
 SHEETING SERIES 3930' OR APPROVED EQUIVALENT.

BOLT (TYPICAL). SEE POST  
 MOUNTING DETAIL (THIS SHEET).

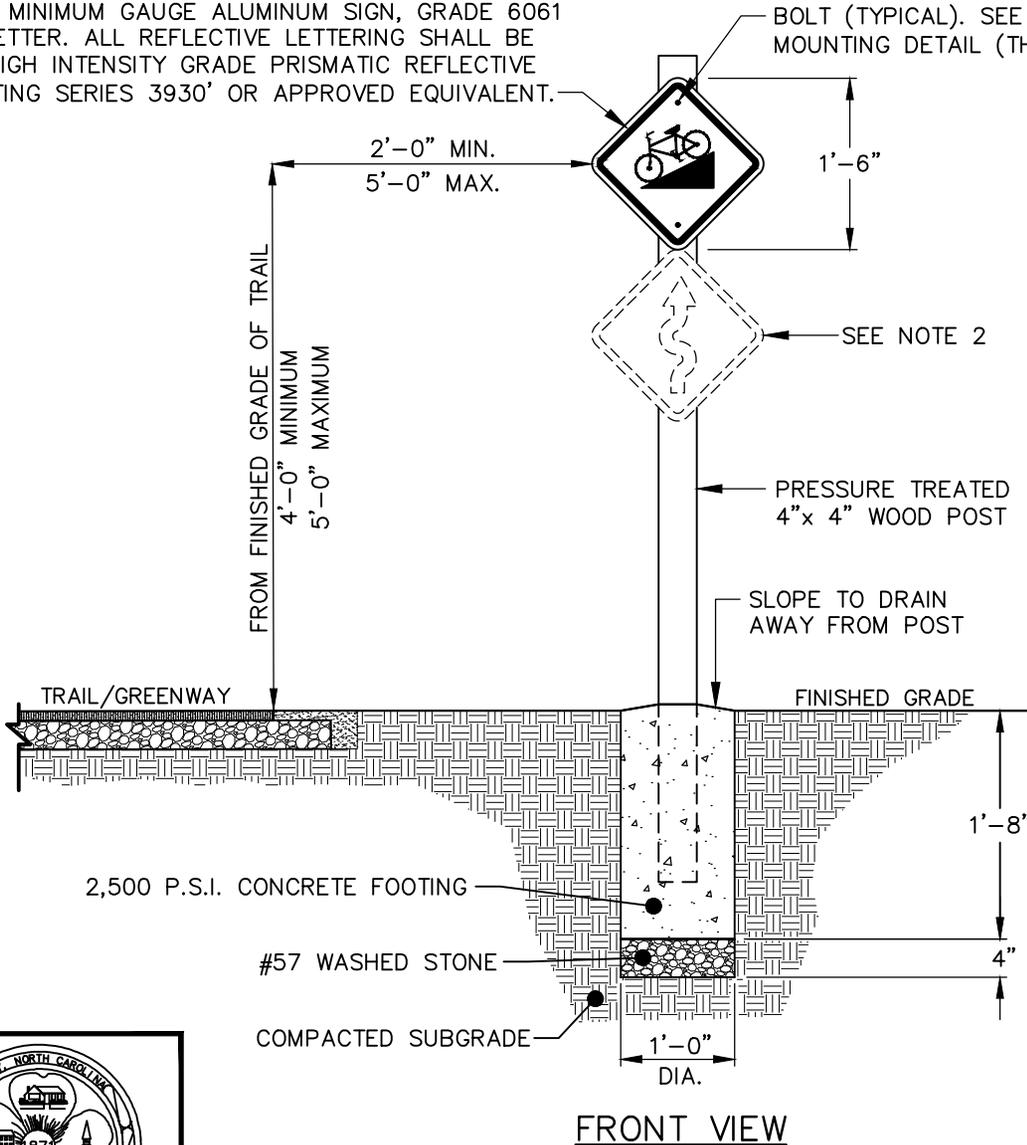

MOUNT SIGN ON WOOD POST TO  
**NCDOT** SPECIFICATIONS. ALL  
 HARDWARE TO BE GALVANIZED AND  
 FILED TO PREVENT THEFT/REMOVAL.

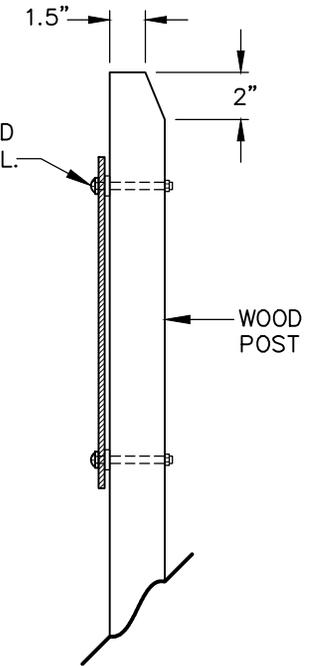

POST MOUNTING DETAIL

**NOTES:**

1. SIGN SHALL MEET CURRENT **MUTCD** REQUIREMENTS FOR COLOR AND REFLECTION.
2. IF **MUTCD** W1-5 SIGN FACE IS TO BE MOUNTED ON SAME POLE, STEEP SLOPE SIGN FACE SHALL BE MOUNTED PER HEIGHT SPECIFICATIONS AT RIGHT, AND CURVES AHEAD SIGN SHALL BE MOUNTED DIRECTLY BELOW.



EFFECTIVE: 01/05/17

STANDARD PRIVATE TRAIL SIGN: STEEP SLOPE

DETAIL No.

09000.36

SHEET 1 OF 1