


TOP VIEW

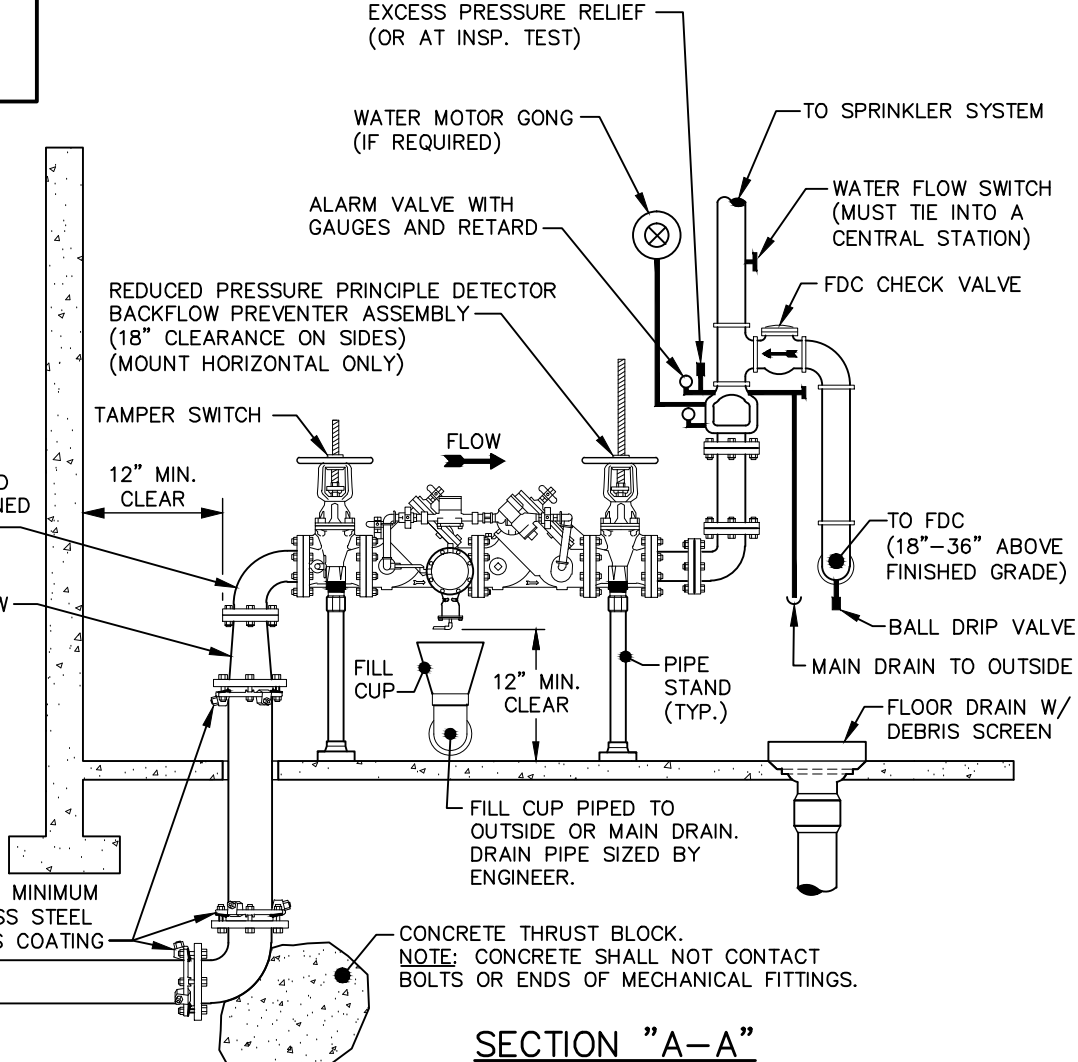

SECTION "A-A"

AWWA SPEC #C151
CLASS 350 FLANGED
FITTING, CEMENT LINED
DUCTILE IRON

REDUCER OR
REDUCER ELBOW

USE MEGA-LUGS OR A MINIMUM
OF TWO 3/4" STAINLESS STEEL
RODS WITH BITUMINOUS COATING

CONCRETE THRUST BLOCK.
NOTE: CONCRETE SHALL NOT CONTACT
BOLTS OR ENDS OF MECHANICAL FITTINGS.

STANDARD SPRINKLER RISER, NFPA 13



EFFECTIVE: 12/10/09

DETAIL No.
06000.17
SHEET 1 OF 2