


USE SOLID BRICK/BLOCK & MORTAR

PIPE DIAMETER	MINIMUM WALL THICKNESS
8" - 12"	4"
16" OR GREATER	8"



*LOCATED IN FIRST MANHOLE FROM TIE-IN. SOLID WALL MUST BE BUILT BEFORE LAYING NEXT RUN OF PIPE.

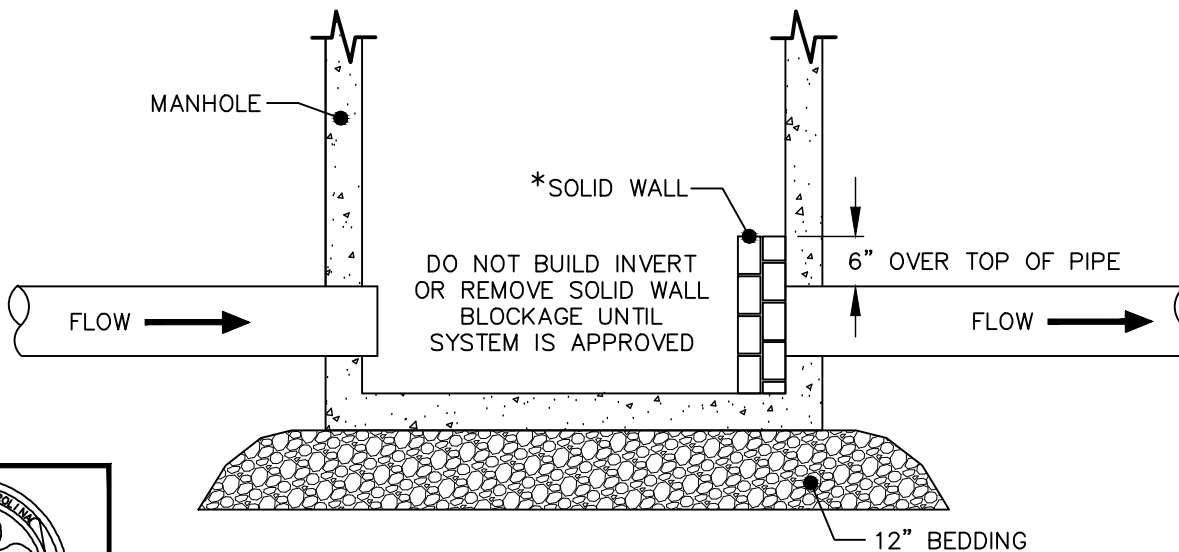

EFFECTIVE: 12/10/09

SANITARY SEWER PROTECTION DURING CONSTRUCTION

DETAIL No.

07000.17
SHEET 1 OF 1