



STANDARD MANHOLE RING AND COVER (PER DETAIL 07000.05) MAY BE CAST IN SLAB OR SECURED TO TOP OVER STEPS

CONCRETE SLAB

- NOTES:**
1. EITHER SOLID BRICK, SOLID BLOCK, OR PRECAST CONCRETE MAY BE USED.
 2. STANDARD STEPS REQUIRED, 16 INCHES ON CENTER, WHERE DEPTH EXCEEDS 3 FEET.
 3. USE MINIMUM 3000 P.S.I. CONCRETE MIX.
 4. INSIDE DIMENSION FOR 24 INCH PIPE AND GREATER USE PIPE DIAMETER PLUS 12 INCHES.
 5. WHERE DEPTH EXCEEDS 3 FEET, MANHOLE RING AND COVER TO BE LOCATED OVER STEPS.
 6. LETTERING FOR MANHOLE COVER PER DETAIL 07000.03.

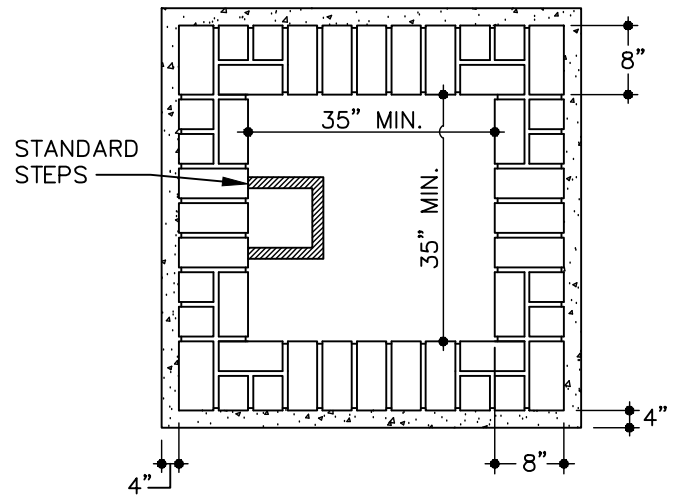

PLAN

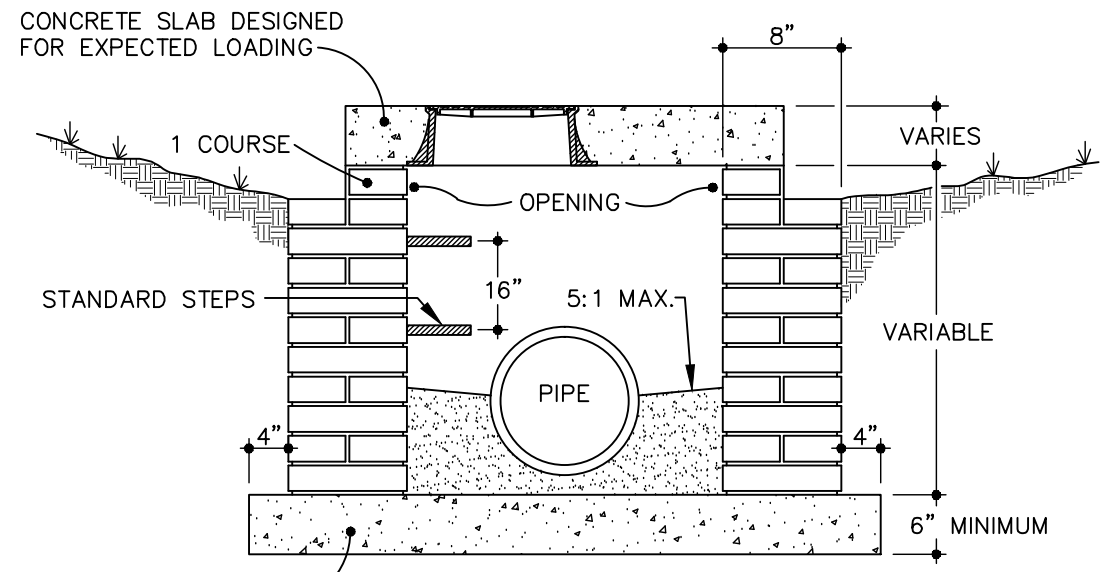

SECTION



EFFECTIVE: 12/10/09

STANDARD YARD INLET WITH CONCRETE SLAB

DETAIL No.
08000.01
SHEET 1 OF 1